



Delrin® 100CPE NC010

ACETAL RESIN

Common features of Delrin® acetal resins include mechanical and physical properties such as high mechanical strength and rigidity, excellent fatigue and impact resistance, as well as resistance to moisture, gasoline, lubricants, solvents, and many other neutral chemicals. Delrin® acetal resins also have excellent dimensional stability and good electrical insulating characteristics. They are naturally resilient, self-lubricating, and available in a variety of colors and speciality grades.

Delrin® acetal resin typically is used in demanding applications in the automotive, domestic appliances, sports, industrial engineering, electronics, and consumer goods industries.

Delrin® 100CPE is a high viscosity acetal homopolymer for use in easy-to-fill moulds with very low VOC emissions. Delrin® 100CPE provides optimum mechanical performance with its excellent combination of toughness and strength with improved processing, thermal stability and productivity for injection moulding.

总说明

树脂鉴别	POM	ISO 1043
制品标识码	>POM<	ISO 11469

流变性能

熔体体积流动速度, MVR	1.9 cm ³ /10min	ISO 1133
熔体质量流动速率	2.3 g/10min	ISO 1133
温度	190 °C	ISO 1133
负荷	2.16 kg	ISO 1133
熔体质量流率, 温度	190 °C	ISO 1133
熔体质量流率, 载荷	2.16 kg	ISO 1133
模塑收缩率, 平行	2.2 %	ISO 294-4, 2577
模塑收缩率, 垂直	1.9 %	ISO 294-4, 2577

机械性能

拉伸模量	2900 MPa	ISO 527-1/-2
屈服应力	71 MPa	ISO 527-1/-2
屈服伸长率	28 %	ISO 527-1/-2
名义断裂伸长率	45 %	ISO 527-1/-2
弯曲模量	2800 MPa	ISO 178
弯曲应力 (3.5%应变)	76 MPa	ISO 178
简支梁无缺口冲击强度, +23°C	N kJ/m ²	ISO 179/1eU
简支梁无缺口冲击强度, -30°C	450 kJ/m ²	ISO 179/1eU
简支梁缺口冲击强度, +23°C	16 kJ/m ²	ISO 179/1eA
简支梁缺口冲击强度, -30°C	13 kJ/m ²	ISO 179/1eA
洛氏硬度	90 -	ISO 2039-2
洛氏硬度, Rockwell	120 -	ISO 2039-2
Poisson's ratio	0.37 -	



Delrin® 100CPE NC010

ACETAL RESIN

热性能

熔融温度, 10°C/min	178 °C	ISO 11357-1/-3
热变形温度, 1.80 MPa	95 °C	ISO 75-1/-2
热变形温度, 0.45 MPa	160 °C	ISO 75-1/-2
线性热膨胀系数, 平行, -40-23°C	95 E-6/K	ISO 11359-1/-2
线膨胀系数, 平行	110 E-6/K	ISO 11359-1/-2
线性热膨胀系数, 垂直, -40-23°C	100 E-6/K	ISO 11359-1/-2
线膨胀系数, 垂直	100 E-6/K	ISO 11359-1/-2
相对温度指数, 电气性能, 0.75mm	50 °C	UL 746B
相对温度指数, 电气性能, 1.5mm	110 °C	UL 746B
相对温度指数, 电气性能, 3mm	110 °C	UL 746B
相对温度指数, 冲击, 0.75mm	50 °C	UL 746B
相对温度指数, 冲击, 1.5mm	85 °C	UL 746B
相对温度指数, 冲击, 3mm	90 °C	UL 746B
相对温度指数, 强度, 0.75mm	50 °C	UL 746B
相对温度指数, 强度, 1.5mm	90 °C	UL 746B
相对温度指数, 强度, 3mm	95 °C	UL 746B

燃烧性能

1.5mm名义厚度时的燃烧性	HB class	IEC 60695-11-10
测试用试样的厚度	1.5 mm	IEC 60695-11-10
UL注册	yes -	UL 94
厚度为h时的燃烧性	HB class	IEC 60695-11-10
测试用试样的厚度	0.8 mm	IEC 60695-11-10
UL注册	yes -	UL 94
FMVSS Class	B -	ISO 3795 (FMVSS 302)
燃烧速率, 厚度: 1毫米	25 mm/min	ISO 3795 (FMVSS 302)

电性能

相对介电常数, 100Hz	4.1 -	IEC 62631-2-1
相对介电常数, 1MHz	4 -	IEC 62631-2-1
介质损耗因子, 100Hz	25 E-4	IEC 62631-2-1
介质损耗因子, 1MHz	45 E-4	IEC 62631-2-1
体积电阻率	>1E13 Ohm.m	IEC 62631-3-1
表面电阻率	6E14 Ohm	IEC 62631-3-2
相对漏电起痕指数	600 -	IEC 60112

其它性能

吸湿性, 2mm	0.1 %	类似ISO 62
吸水性, 2mm	1 %	类似ISO 62
密度	1420 kg/m ³	ISO 1183
熔体密度	1180 kg/m ³	

Delrin[®] 100CPE NC010

ACETAL RESIN

VDA性能

甲醛散发	<2 mg/kg	VDA 275
有机化合物的排放	0.3 □ gC/g	VDA 277
有机废气的热解吸分析	0.6 □ g/g	VDA 278
雾化	81 %	ISO 6452
雾化	1 mg	ISO 6452

注塑

建议干燥	是
干燥温度	80 °C
干燥时间, 除湿干燥机	2 - 4 h
加工前水分含量	≤ 0.2 %
最优熔体温度	205 °C
注塑 熔体温度	200 °C
注塑 熔体温度	210 °C
螺杆最大切线速度	0.2 m/s
最优模具温度	90 °C
模具温度	80 °C
模具温度	100 °C
保压范围	90 - 110 MPa
保压时间	8 s/mm
回火时间, 可选	30 ^[1] min/mm
回火温度	160 °C

[1]: 30 min + 5 min/mm of thickness

薄膜挤出成型

干燥温度	75 - 85 °C
干燥时间, 除湿干燥机	2 - 4 h
加工前水分含量	≤ 0.2 %
最优熔体温度	200 °C
熔体温度范围	195 - 205 °C

成型

注塑

Drying is recommended, but not necessary for newly opened packaging stored in a dry location.

Follow the drying guidelines above in the following cases:


- If moisture is above the Processing Moisture Content recommendation,
- When a resin container is damaged,
- When the material is not properly stored in a dry place at room temperature, or
- When packaging stays open for a significant time.



Delrin[®] 100CPE NC010

ACETAL RESIN

粘度 - 剪切速度

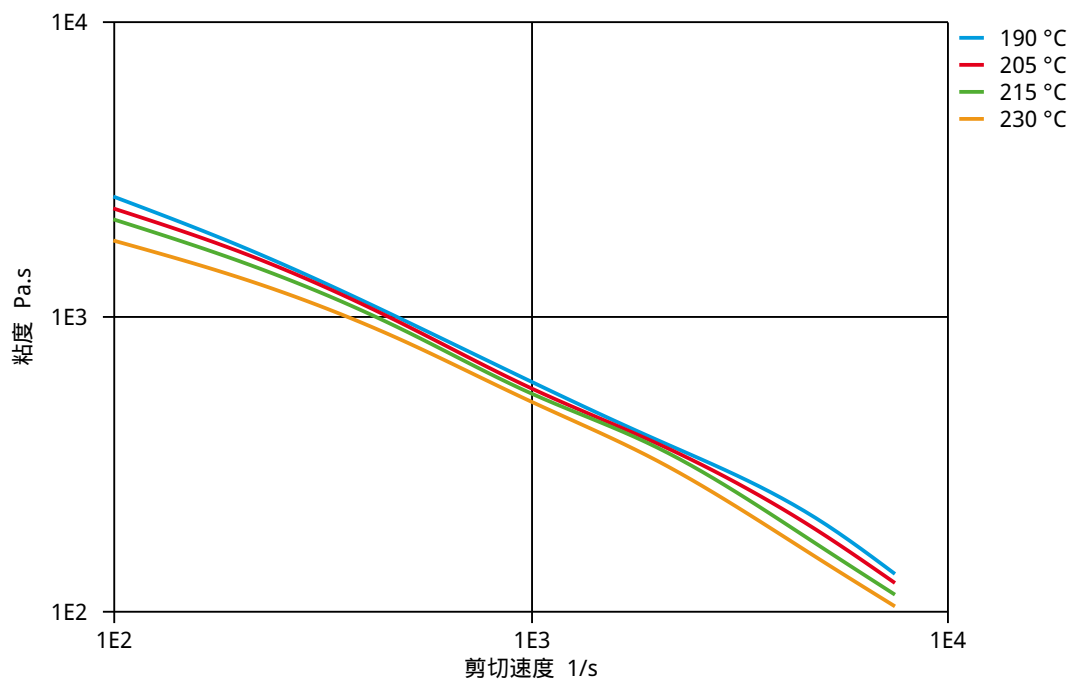




Delrin[®] 100CPE NC010

ACETAL RESIN

剪切应力 - 剪切速度

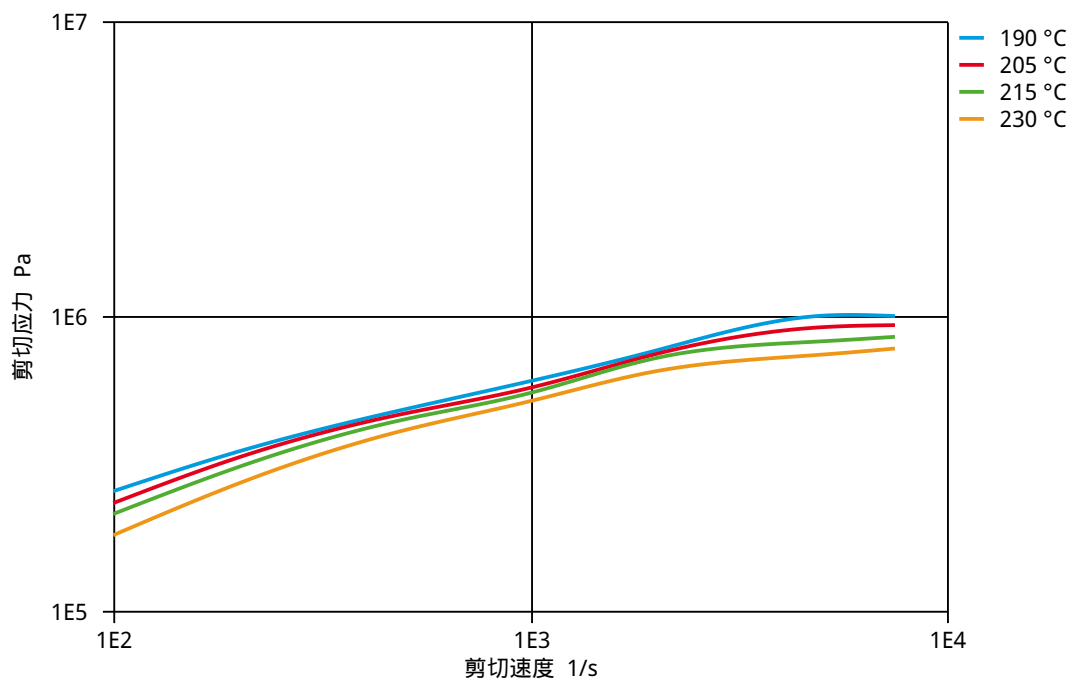




Delrin[®] 100CPE NC010

ACETAL RESIN

应力 - 应变.

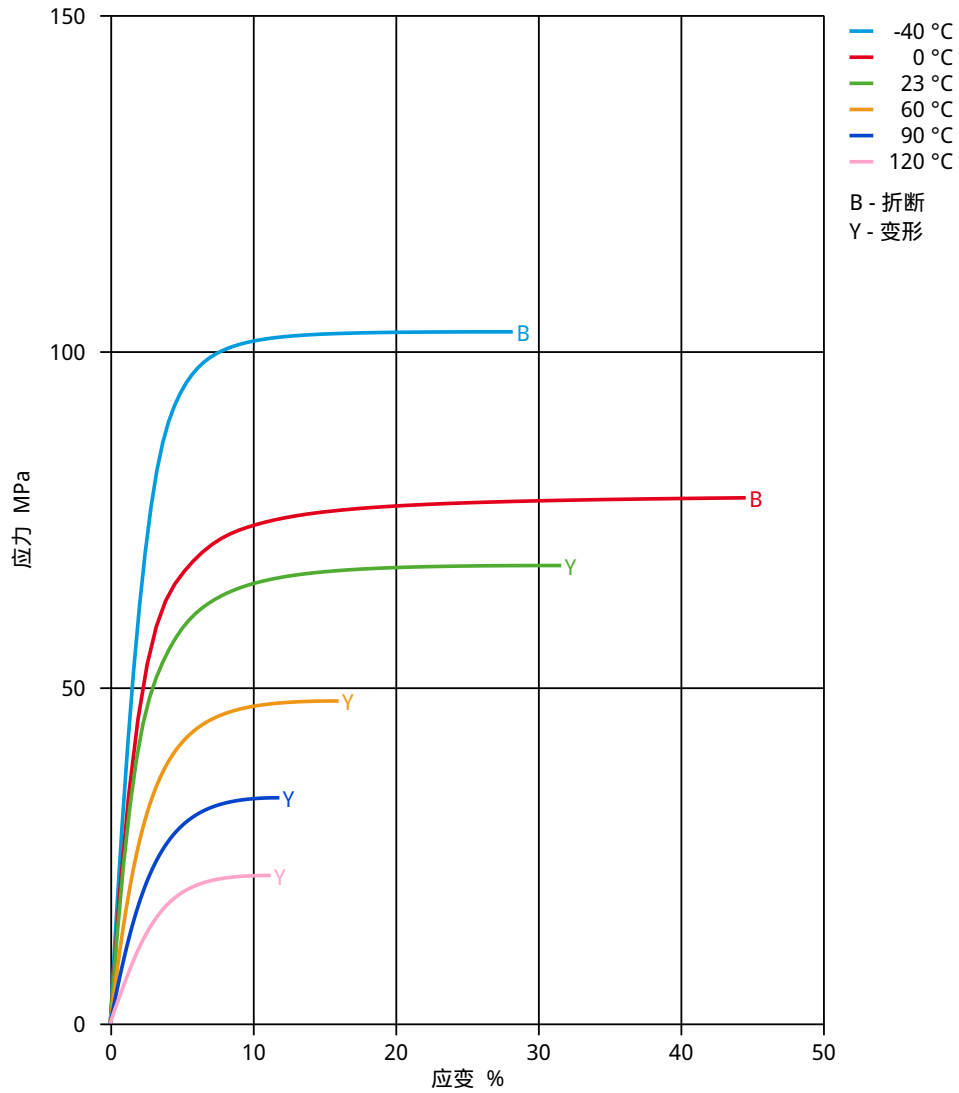




Delrin[®] 100CPE NC010

ACETAL RESIN

正割模量 - 应变.

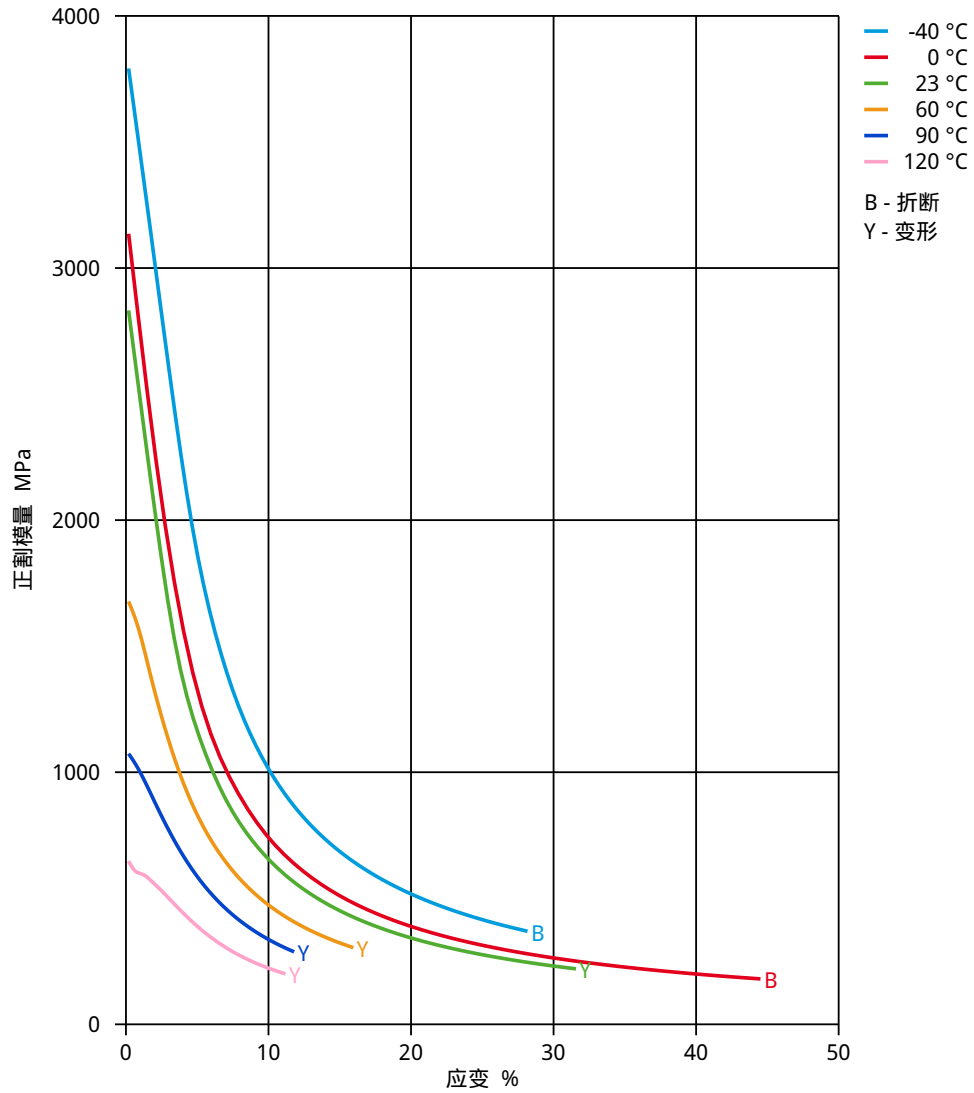




Delrin[®] 100CPE NC010

ACETAL RESIN

拉伸模量 - 温度

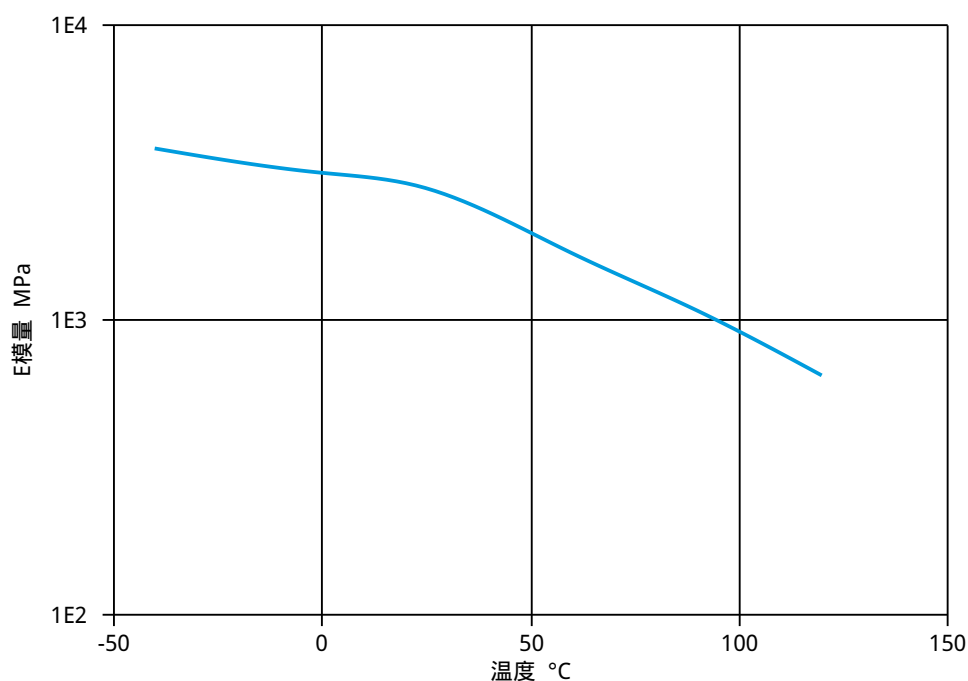

Revised: 2021-11-01

Page: 8 of 8

dupont.com

The information set forth herein is furnished free of charge, is based on technical data that DuPont believes to be reliable, and represents typical values that fall within the normal range of properties. This information relates only to the specific material designated and may not be valid for such material used in combination with other materials or in other processes. It is intended for use by persons having technical skill, at their own discretion and risk. This information should not be used to establish specification limits nor used alone as the basis of design. Handling precaution information is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards and comply with applicable law. Since conditions of product use and disposal are outside our control, we make no warranties, express or implied, and assume no liability in connection with any use of this information. As with any product, evaluation under end-use conditions prior to specification is essential. Nothing herein is to be taken as a license to operate or a recommendation to infringe on patents.

CAUTION: Do not use DuPont materials in medical applications involving implantation in the human body or contact with internal body fluids or tissues unless the material has been provided from DuPont under a written contract or other acknowledgement that is consistent with the DuPont policy regarding medical applications and expressly acknowledges the contemplated use. For further information, please contact your DuPont representative.

DuPont's sole warranty is that our products will meet our standard sales specifications in effect at the time of shipment. Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DUPONT SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, OR NON-INFRINGEMENT. DUPONT DISCLAIMS LIABILITY FOR ANY SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.

DuPont[™], the DuPont Oval Logo, and all trademarks and service marks denoted with [™], SM or [®] are owned by affiliates of DuPont de Nemours, Inc. unless otherwise noted.

© 2021 DuPont. All rights reserved.